


**Designed to meet the needs
of the joinery trade, furniture
manufacturers, suppliers of building
materials, shopfitters, boatbuilders
fencing manufacturers, export
packers, colleges and universities.**




**High production,
minimum waste, reduced
operator fatigue.**

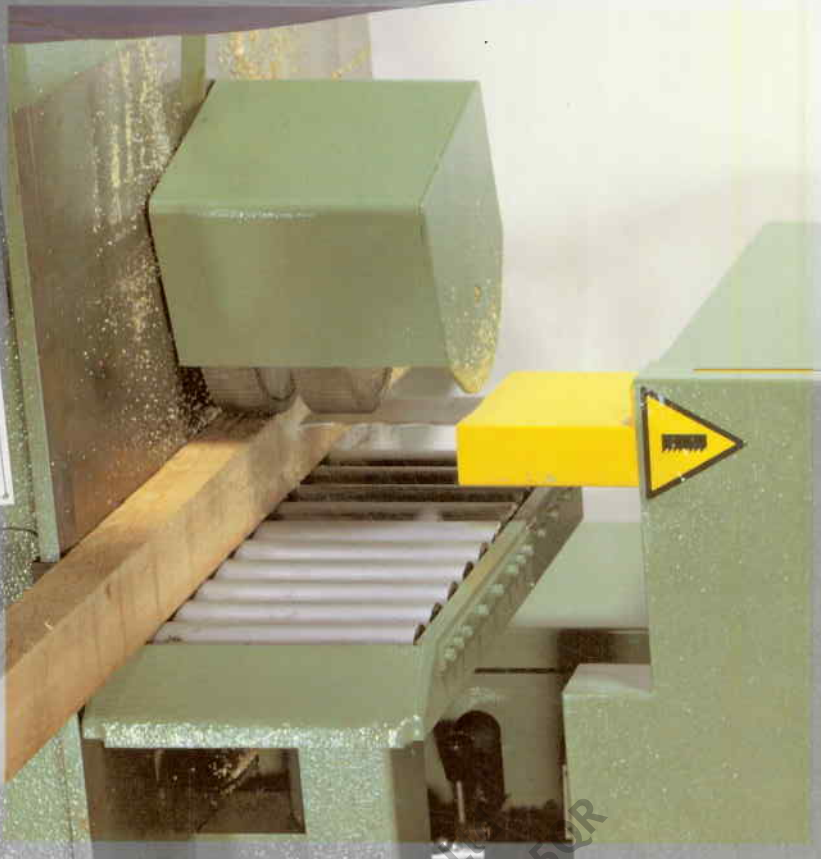

Scott+Sargeant Woodworking Machinery Ltd
1 Blatchford Road, Horsham, West Sussex RH13 5UR
ENGLAND
Tel +44 (0) 1403 273000
Web www.scosarg.com

Specification

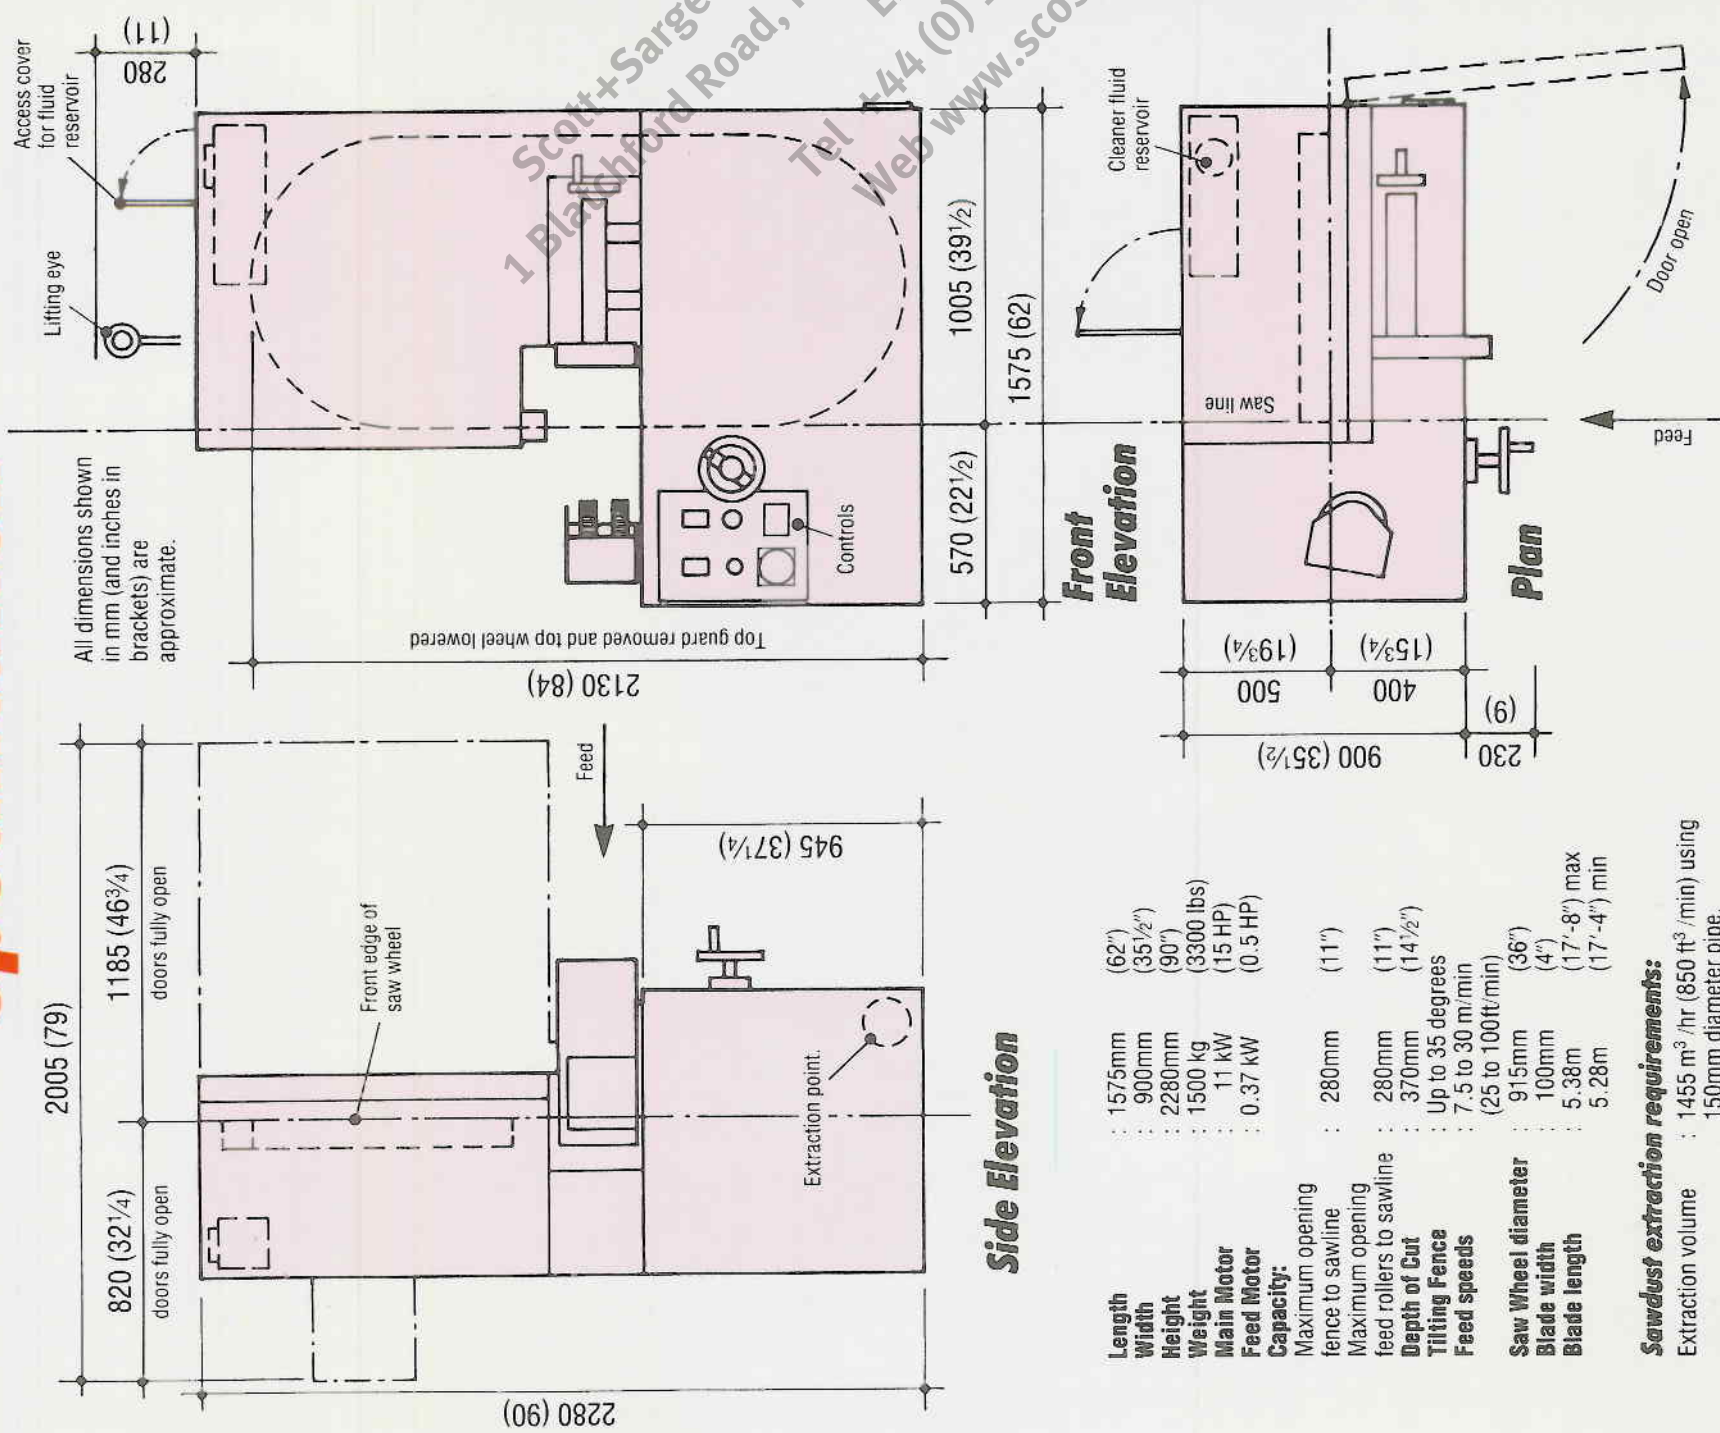

Side Elevation

- Length : 1575mm (62")
- Width : 900mm (35 1/2")
- Height : 2280mm (90")
- Weight : 1500 kg (3300 lbs)
- Main Motor : 11 kW (15 HP)
- Feed Motor : 0.37 kW (0.5 HP)
- Capacity:
- Maximum opening fence to sawline : 280mm (11")
- Maximum opening feed rollers to sawline : 280mm (11")
- Depth of Cut : 370mm (14 1/2")
- Tilting Fence : Up to 35 degrees
- Feed speeds : 7.5 to 30 m/min (25 to 100ft/min)
- Saw Wheel diameter : 915mm (36")
- Blade width : 100mm (4")
- Blade length : 5.38m (17'-8") max (17'-4") min

Sawdust extraction requirements:

- Extraction volume : 1455 m³/hr (850 ft³/min) using 150mm diameter pipe.
- Air flow : 22.86 m³/sec (4500 ft³/min)

Safety:

Machine is fully guarded. Emergency stop and isolating switch.

Noise:

Machine idling 78 dB(A).
Cutting 150mm deep softwood at 15 m/min 88 dB (A)_{Leq}
Tests made in accordance with ISO/DIS/7960/3 and ISO/DIS 230/5 measured at the operator's position.

Options:

- Main Motor: 15 kW (20 HP)
- Infeed and outfeed table rollers.
- Rubber covered feed roller.
- Arris rail feed roller.
- Coarse pitch feed roller.
- Increased feed roller opening to 300 mm (12").
- Linear timber measuring device.
- Timber support rollers.

Scott+Sargeant Woodworking Machinery Ltd
 1 Blahford Road, Horsham, West Sussex RH13 5QR
 ENGLAND
 Tel: +44 (0) 1403 273000
 Web: www.scosarg.com

Low Noise 'Eagle' Resaw


Features

- No foundation pit
- Low noise
- Fully guarded
- Heavy steel fabrication
- Engineered for quality
- Crowned saw wheels
- Wide tensioned saws
- Thin saw kerf
- Pressure sawguides
- Replaceable saw guide pads
- Adequate power

Benefits

- Easy installation, quick resiting
- No noise enclosure
- Maximum safety
- Vibration free cutting
- Long working life
- No tyre replacement problems
- Straight cutting for long periods
- Minimum waste, maximum yield
- Stable blade for accurate cutting
- Quick maintenance
- 11 kW or 15 kW (15 HP or 20 HP) motor
- Soft start
- Correct forces over full opening
- Correct feed speeds
- Minimum down time
- Positive grip and climbability
- Wide board cutting
- Good workpiece support and accurate sawing
- Smooth timber flow
- Feathered edge, angle cutting
- Large capacity
- Deep sawing capability
- Easy timber return
- No hydraulic or pneumatic problems
- Sensitive, strong and reliable saw tension
- Effective control of resin and sawdust build up and less noise generation
- Correct flow of cleaning fluid
- No fire hazard
- Quick removal of waste
- Move by truck or crane
- Easy operator training and enhanced safety
- Full parts ~~availability~~
- Trouble free into the next century
- Easy to operate
- Best 'Value for Money' machine on the market
- Controlled drip feed cleaning system
- Cleansing fluid automatic cut off
- Sawdust extraction point
- Lifting points
- Grouped controls with emergency stop
- 12 months guarantee
- Spares and service support
- No gimmicks
- Low capital cost

Distributor/Agent

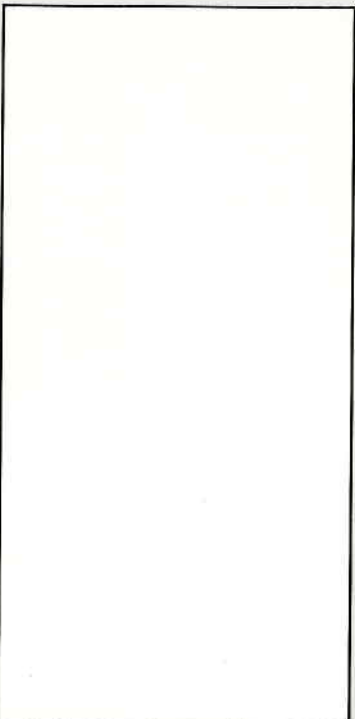

Stenner products acclaimed World-wide



We offer you a quality product backed by 100 years resawing experience to maximise your profit and earn a high return on investment.

Stenner enjoy a reputation for outstanding quality, efficiency and speed of after-sales, replacement parts and maintenance service that others strive to equal.




BY APPOINTMENT TO
HER MAJESTY THE
MANUFACTURERS OF
SAWING MACHINES
OF
STENNER

STENNER

Stenner of Tiverton Limited,
Tiverton, Devon,
EX16 4JX
United Kingdom.
Telephone (0884) 253691
Telex 94013695 STEN G
Fax (0884) 257794

Low Noise 'Eagle' Resaw

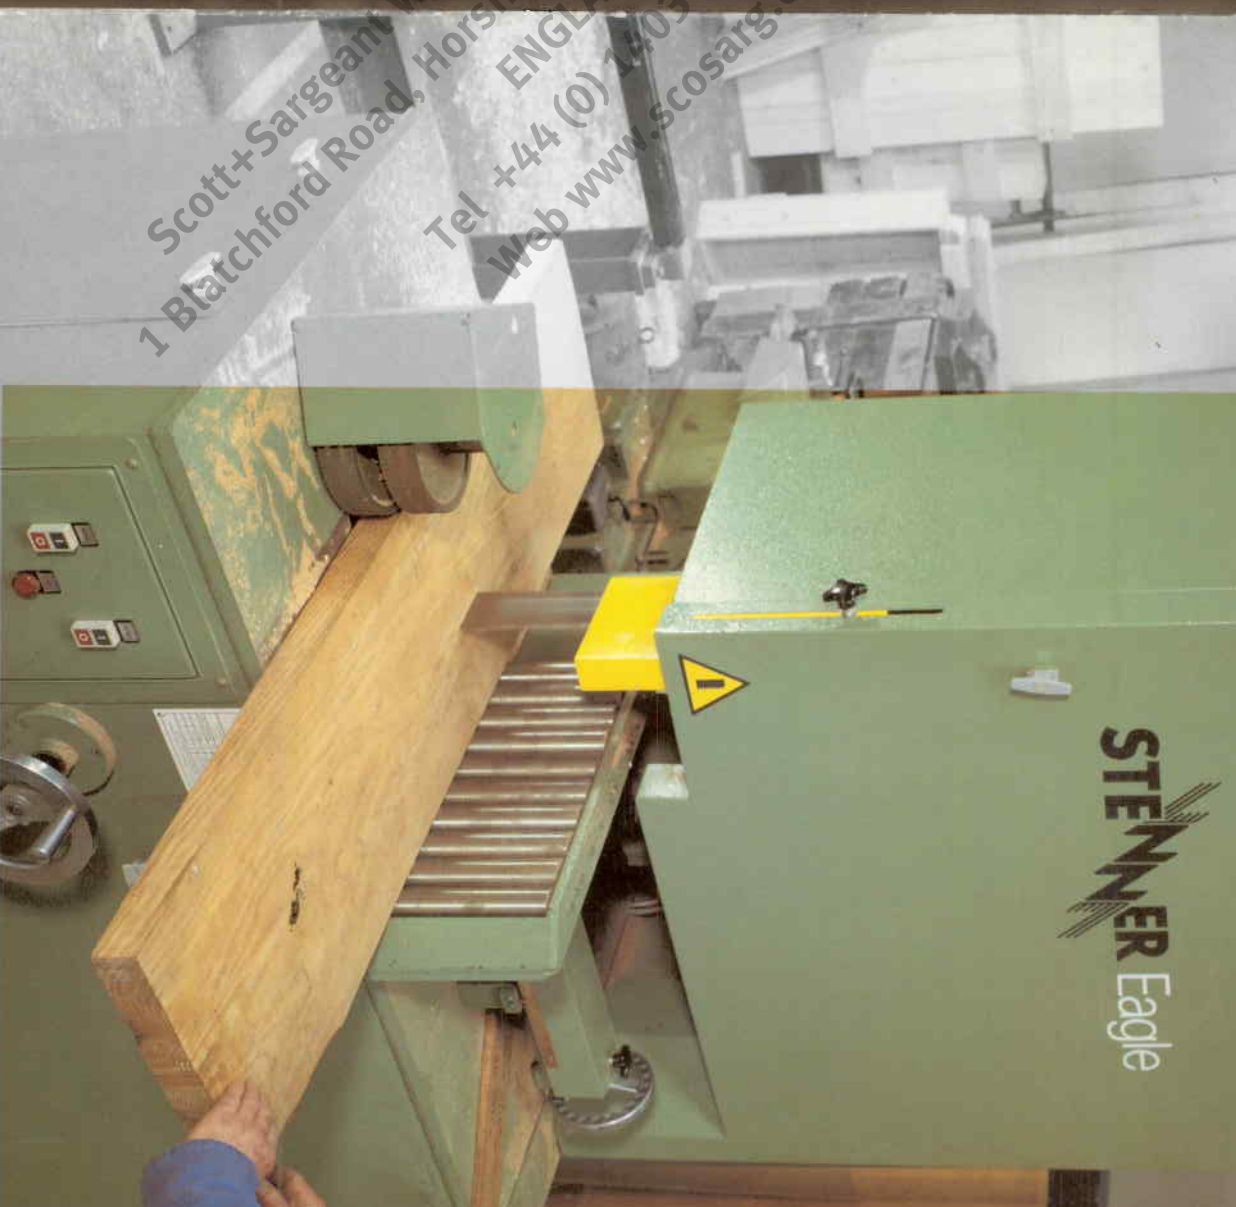

Scott+Sargeant
1 Blatchford Road, Horsfield, ENGLAND
Tel: +44 (0) 1703 7403
Web: www.scosarg


STENNER



BY APPOINTMENT TO
HER MAJESTY THE
MANUFACTURERS OF
SAWING MACHINES
OF
STENNER


Stenner has a company policy of continuous improvement and development, therefore specifications are subject to change without notice. The company accepts no responsibility for discrepancies in specifications or illustrations contained in its publications.

Stenner 'Eagle' — The best machine in its class!

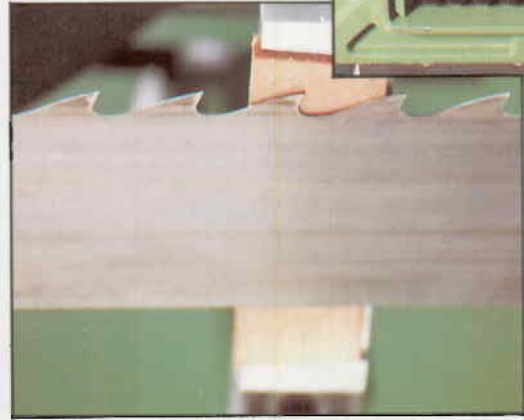

Heavy duty support column for top saw wheel with sensitive tensioning system. Substantial steel fabrications throughout.


100 mm (4") wide tensioned saw blade. Pressure sawguides for blade stability and cutting accuracy.

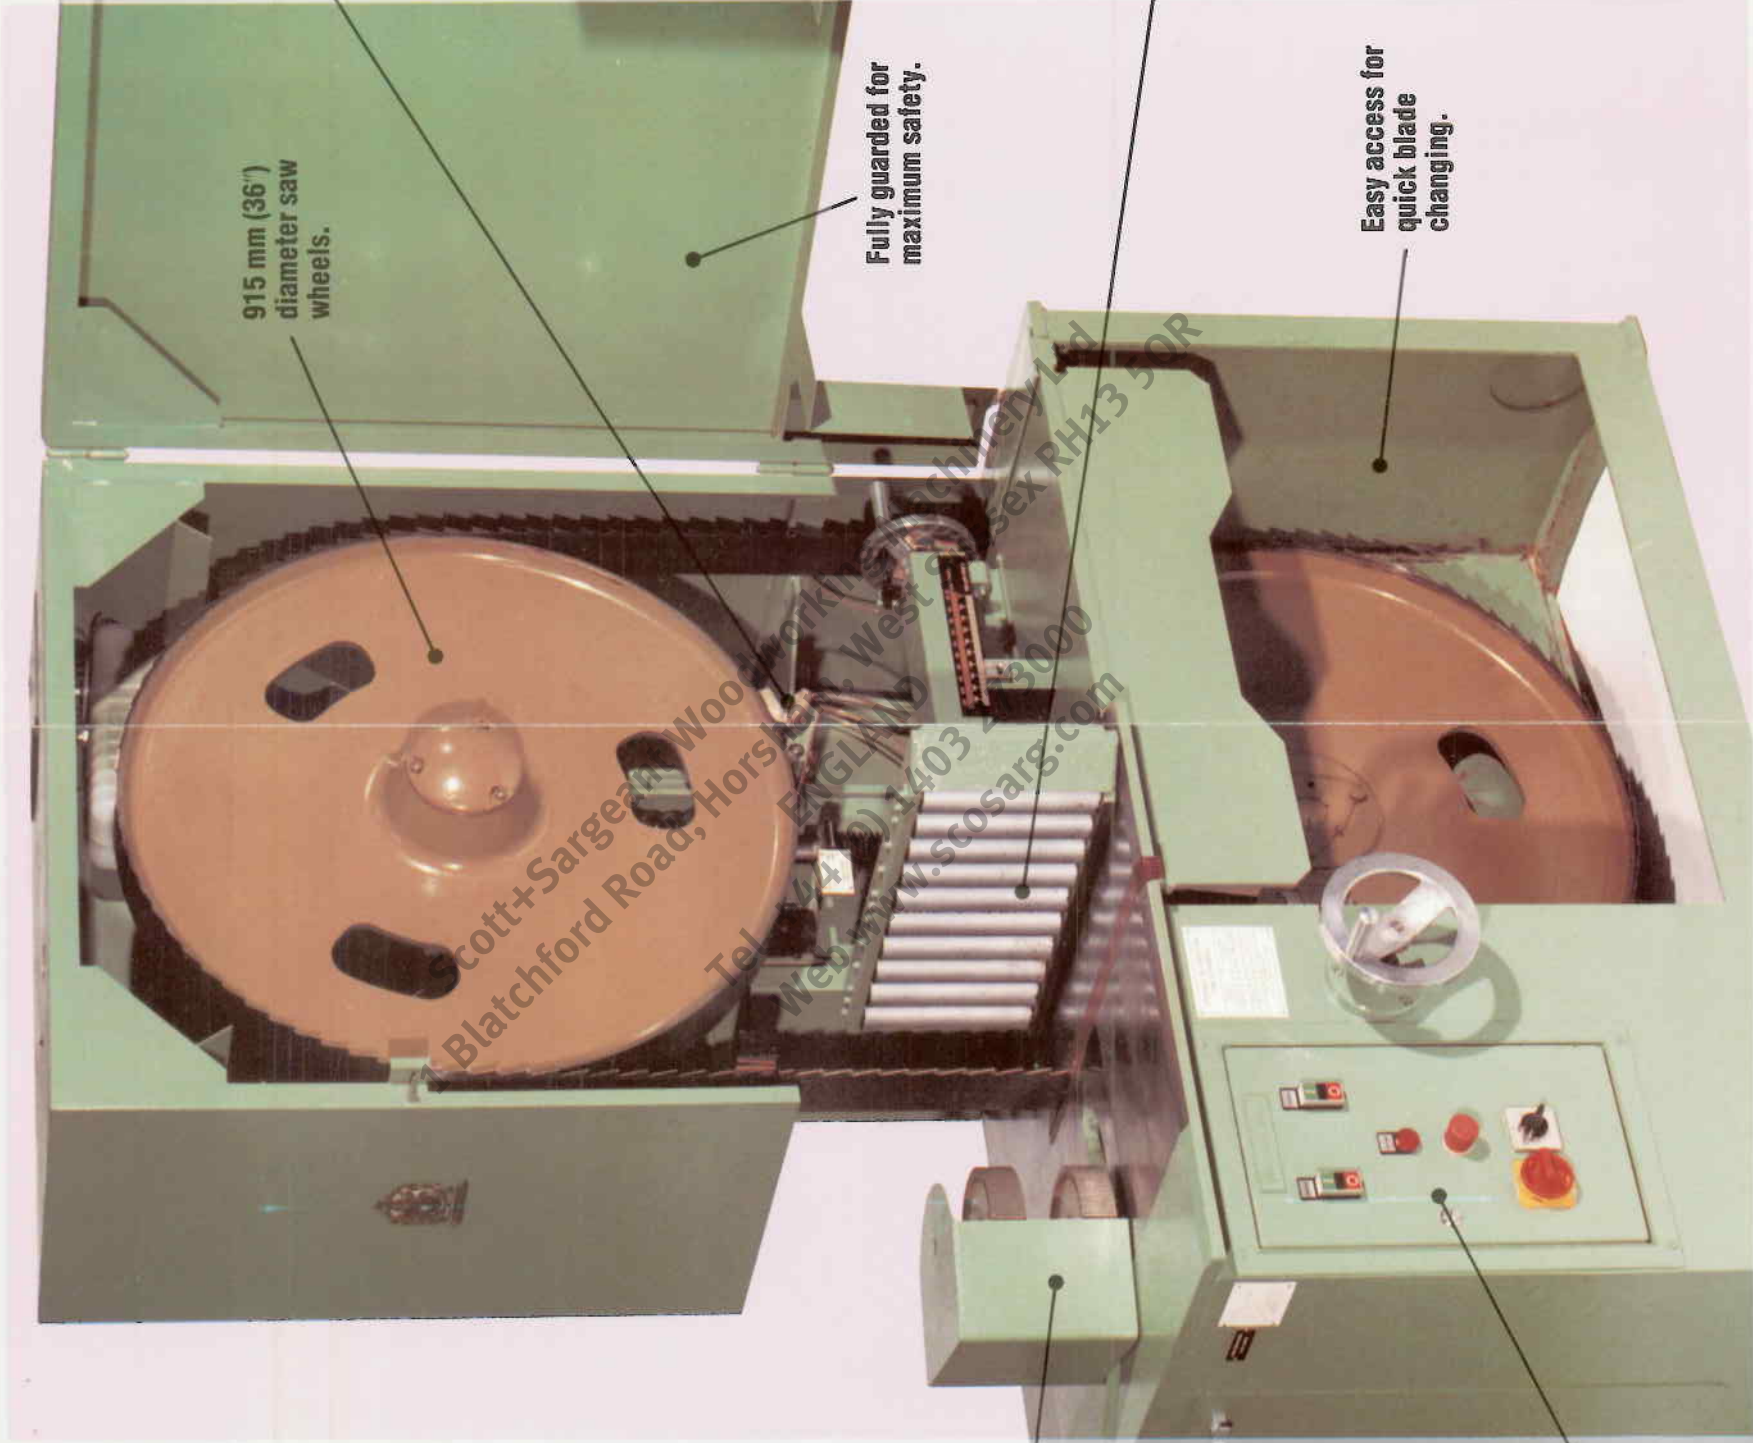

915 mm (36") diameter saw wheels.

Fully guarded for maximum safety.


Easy access for quick blade changing.

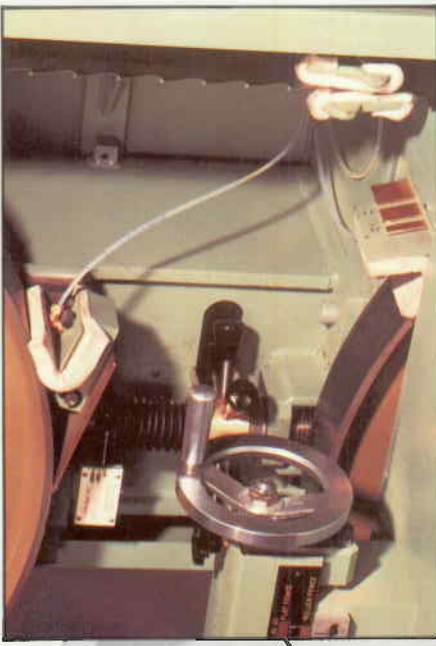


Saw wheels cleaned by scrapers and lubricated pads. Blade cleaned by spring loaded pads.



Cleaning fluid accurately controlled by drip feed valves with automatic cut-off device.

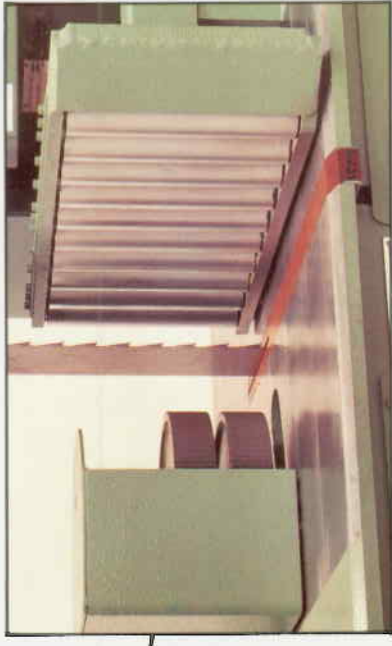

Deep, robust fence with sealed bearing rollers.

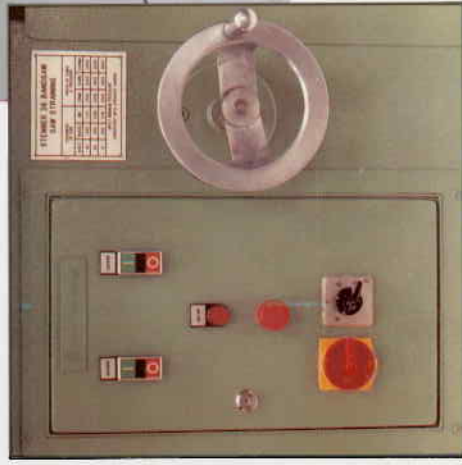

Simple to operate. Grouped controls at operator's position.

Installed on a flat floor. Requires little floor space — less than 1.5 sq. metres.

Low noise — tested to international standards.

Choice of feed rollers for special applications.