

Luna spindle moulder L 28


Vertical spindle moulder for professional wood working

- Cutter spindle with 3 different speeds. Thus cutters up to 300 Ø mm with 120 mm cutting depth can be used.
- Prepared for the use of end-cutters.
- Large working table of cast iron with "T-slot".
- Solid frame with strong corner profiles.
- Precision straight fence of cast iron with two, individually adjustable scales of light metal.
- Table insert rings with fence for copy moulding (template moulding).
- Comfortable height adjustment of the cutter spindle by means of hand wheel and locking bar.
- Prepared for connection of dust extractor type W 178.
- Delivered with cutter guard "type SUVA", contactor with no volt release, electric cable, table insert rings as well as cover plate, spacing rings, spindle screw and a set of wrenches.

Extra accessories:

- End-cutter device for surface milling.
- End-cutters.
- A large number of safety precision cutters for different moulding operations.
- Tenon guide and adjustable table.

Subject to design changes.

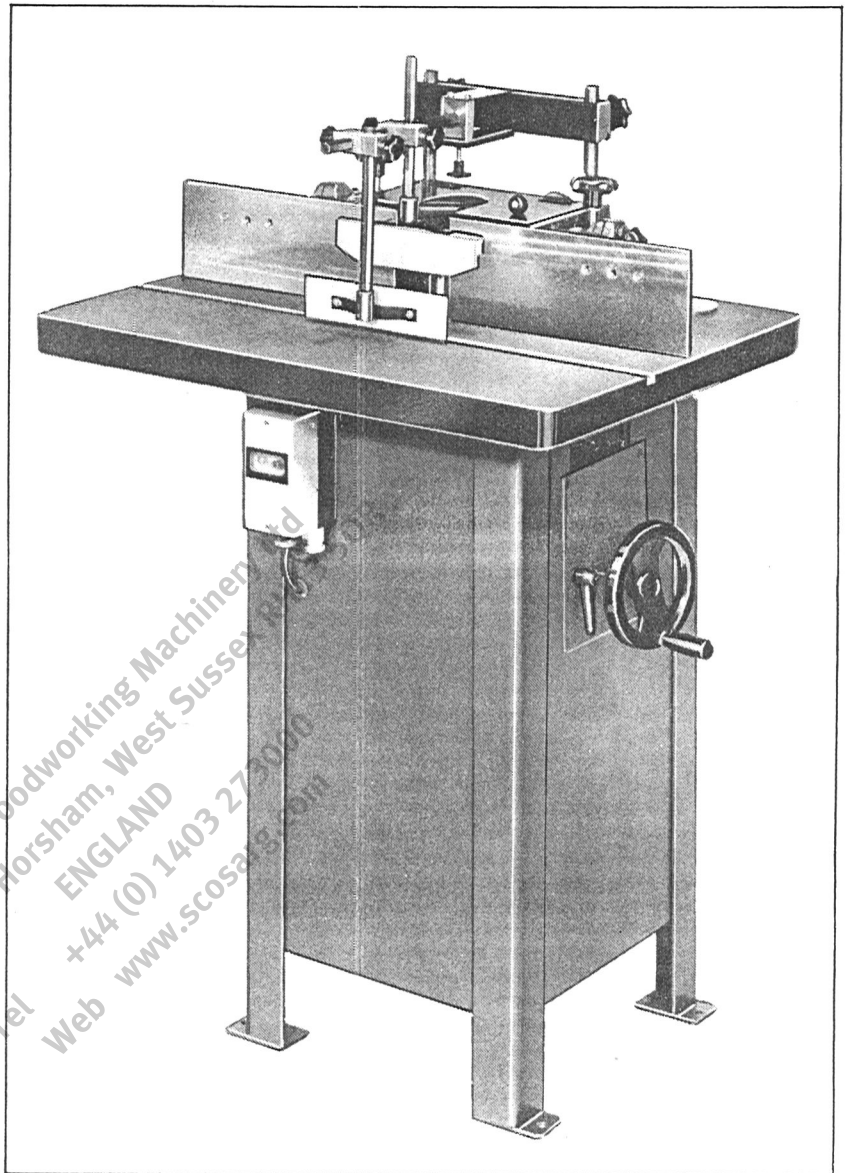

Technical data:

Table size	mm	730 x 570
Table size with extension	mm	940 x 570
Working height	mm	870
Hole size for table insert rings .	mm	150
Number of ring fences	pcs	3
Spindle speeds	r.p.m.	3500-6000-8000
Spindle vertical adjustment ...	mm	120
Spindle Ø	mm	30
Max. cutter fastening height... ..	mm	140
Weight	kg	140

Guard: SUVA cutter guard with separately adjustable scales (including depth adjustment).

Scott+Sargeant Woodworking Machinery Ltd
1 Blatchford Road, Horsham, West Sussex RH13 5QR
Tel +44 (0) 1403 273000
Web www.scosarg.com
ENGLAND